



NANTONG SHENWEI STEEL WIRE ROPE CO., LTD.

CERTIFICATE

Contract No. 20SWGf-MAD01

Reel No. 168REELS

Test No. 1 REEL

CONSTRUCTION AND SIZE

Name of Goods ELECTRIC GALVANIZED STEEL WIRE ROPE

Specification IN ACCORDANCE WITH CONTRACT AND DIN3060

Construction 7X19

Preforming PREFORMED

Net Weight 22512.00 KGS

Gross Weight 23212.00 KGS

LAY R.H.R.L.

Lubrication ALL DRY(E.G.)

Tensile Strength of Wires NOMINAL 1770N/MM2

Length of Wire Rope 1000 Meters

Lay Length: 38.7 mm

TEST RESULT

1. Test result of Rope

Breaking Strength Specified min. 20.81 KN

Actual 23.3 KN

Diameter of rope Nominal Dia. 5.95 mm

Actual 5.96 mm


2. Test result of Wire

Nominal Dia. of Wire (mm)	0.38
Actual Dia. of Wire (mm)	0.39
Tensile Strength of Wires (kgs/mm2)	1800-1870
Wrapping & Unwrapping Test	GOOD
Zinc Coating Test (g/m2)	

3. Chemical Composition (%)

C	Si	Mn	P	S	Cr	Ni	Mo
0.6	0.19	0.51	0.015	0.012	0.05	0.03	0.07

4. Date of Test and Inspection SEP.02.2020

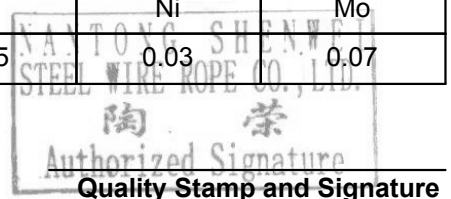



NANTONG SHENWEI STEEL WIRE ROPE CO., LTD.

CERTIFICATE

Contract No. 20SWGf-MAD01

Reel No. 10REELS

Test No. 1 REEL

CONSTRUCTION AND SIZE

Name of Goods ELECTRIC GALVANIZED STEEL WIRE ROPE

Specification IN ACCORDANCE WITH CONTRACT AND DIN3060

Construction 7X19

Preforming PREFORMED

Net Weight 670.00 KGS

Gross Weight 715.00 KGS

LAY R.H.R.L.

Lubrication ALL DRY(E.G.)

Tensile Strength of Wires NOMINAL 1770N/MM2

Length of Wire Rope 500 Meters

Lay Length: 38.7 mm

TEST RESULT

1. Test result of Rope

Breaking Strength Specified min. 20.81 KN

Actual 23.25 KN

Diameter of rope Nominal Dia. 5.95 mm

Actual 5.96 mm

2. Test result of Wire

Nominal Dia. of Wire (mm)	0.38
Actual Dia. of Wire (mm)	0.39
Tensile Strength of Wires (kgs/mm2)	1800-1870
Wrapping & Unwrapping Test	GOOD
Zinc Coating Test (g/m2)	

3. Chemical Composition (%)

C	Si	Mn	P	S	Cr	Ni	Mo
0.6	0.19	0.51	0.015	0.012	0.05	0.03	0.07

4. Date of Test and Inspection SEP.02.2020

